



# TECHNICAL SPECS (SUBMITTAL)


PATENT NUMBERS  
U.S. 5,505,227, 6,254,057, 6,382,585  
Canadian 2,109,684  
European 0654628  
International & Other Patents Pending

## Hands Free Faucet Controllers

applies to Model 1756

### KICK PLATE

CONTROL TUBE BUNDLES (2) ONETO COLD & ONE TO HOT BLOCK { 6 ft. (1829 mm) long x 0.3 in. (8 mm) dia. } exits pedal right, left or back

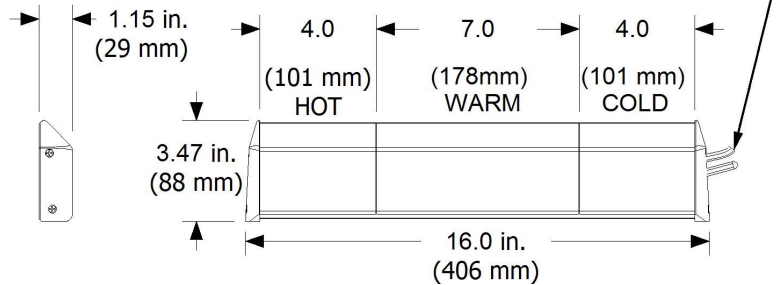


#### SPECIFICATIONS

- Construction: cover - 18 gauge brushed stainless steel or powder coated black or off white  
base - anodized aluminium  
end caps - glass reinforced polypropylene, grey, black or off white
- Motion: vertical face momentary - approximately 1/8" ( 3 mm)  
angled face continuous flow - approximately 1/8" ( 3 mm)
- Mounting: vertical face (cabinet toe kick) with 2 #8 screws
- Cabinet Styles:



### INLINE VALVE BLOCKS

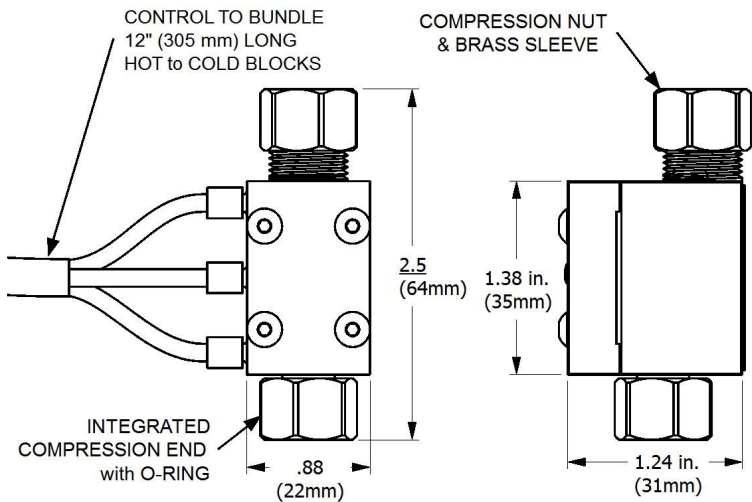

#### SPECIFICATIONS

- Pressure: operating: 0 to 125 psi (862 kpa)  
max at 140°F (60°C)  
static burst: 700 psi (4,830 kpa) at 72°F (22°C)
- Flow: hot & cold blocks combined:  
7.2 gpm @ 60 psi ( 27 l/m @ 4 bar)
- Construction: body: chrome plated brass  
seals: high temperature silicone  
filter and screening: polyethylene
- Filtration: control circuit: 25 micron main  
port: greater than .060" (1.5 mm)

Tapmaster Incorporated  
3-1470 28th Street NE  
Calgary, AB Canada  
T2A 7W6



CSA-B125.1-18  
ASME A112.18.1-2018  
NFS/ANSI 61-2016  
NSF/ANSI 372-2016  
Rev. 4.0



PH: 800-791-8117  
FAX: 403-275-5928  
Web: www.tapmaster.ca  
E-mail: info@tapmaster.ca